

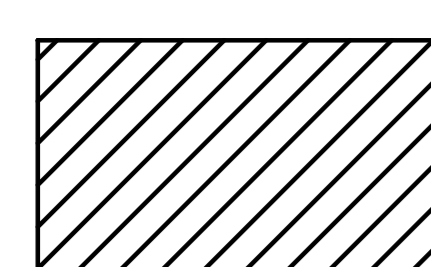
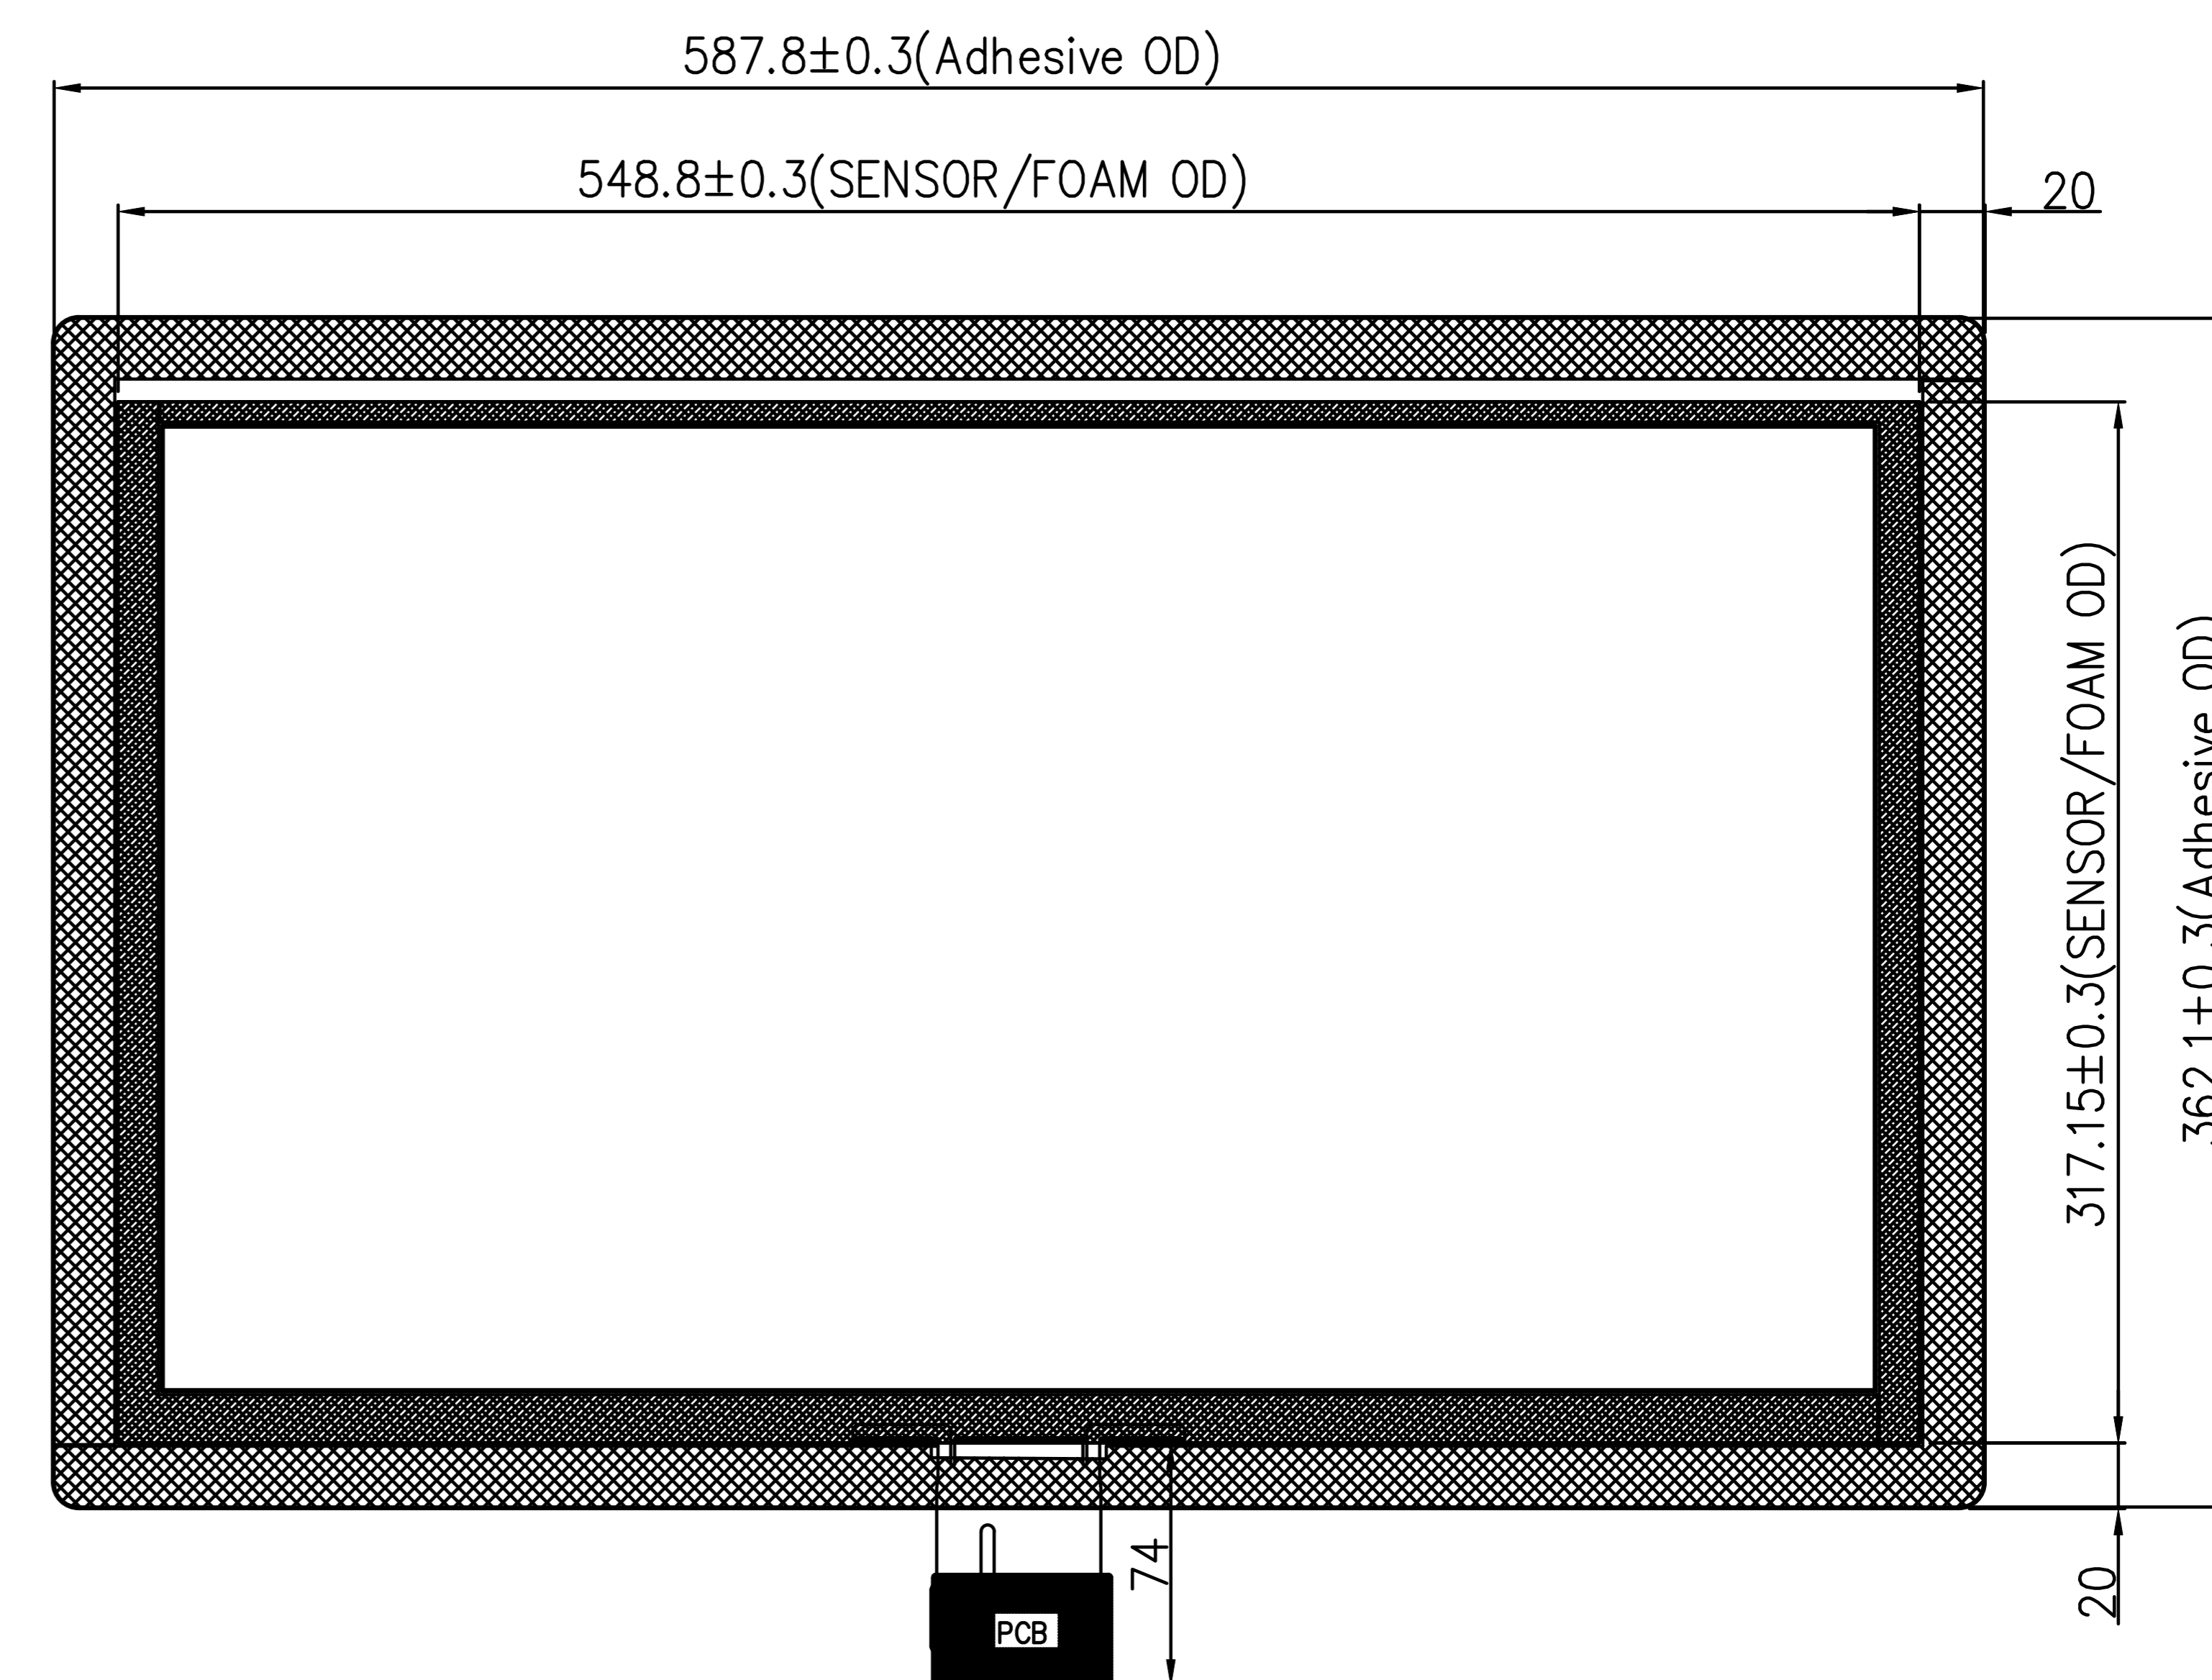
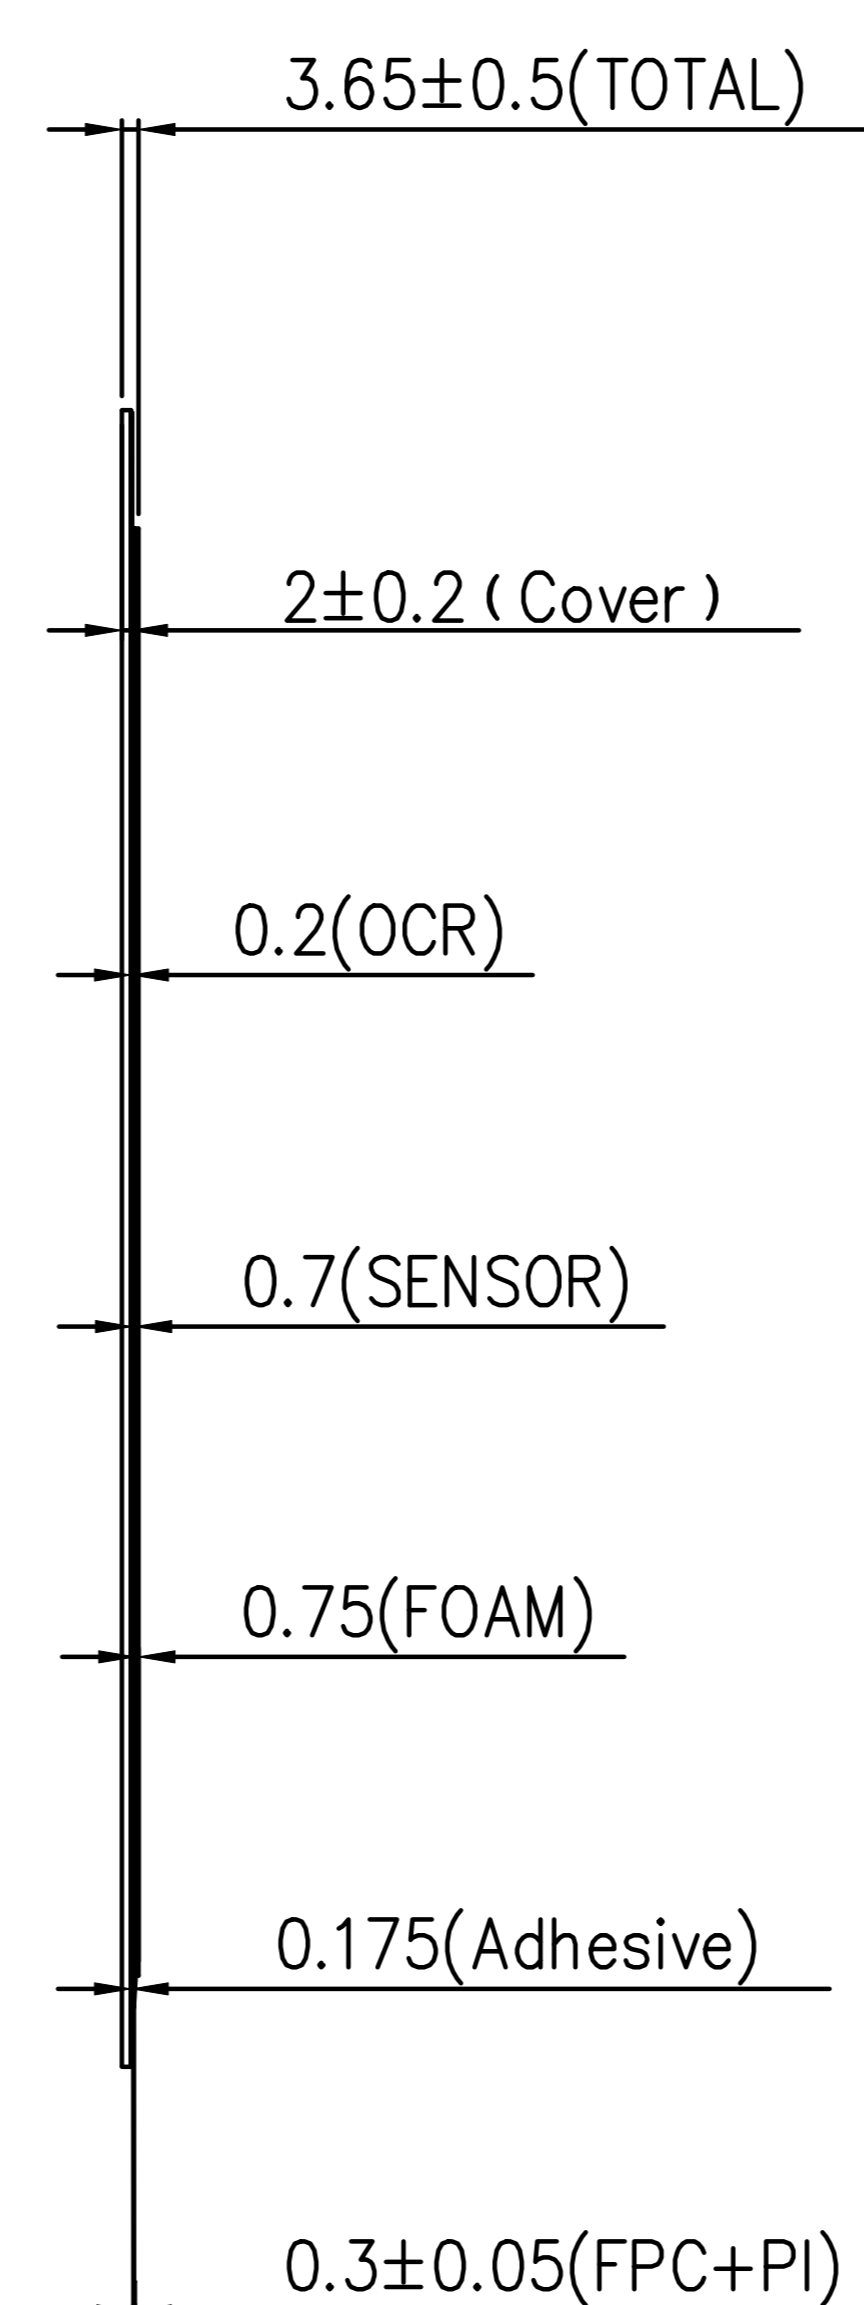


No ROHS hazardous material


Ordinal	Modify content description	Cartographer	Date of change
△			
△			

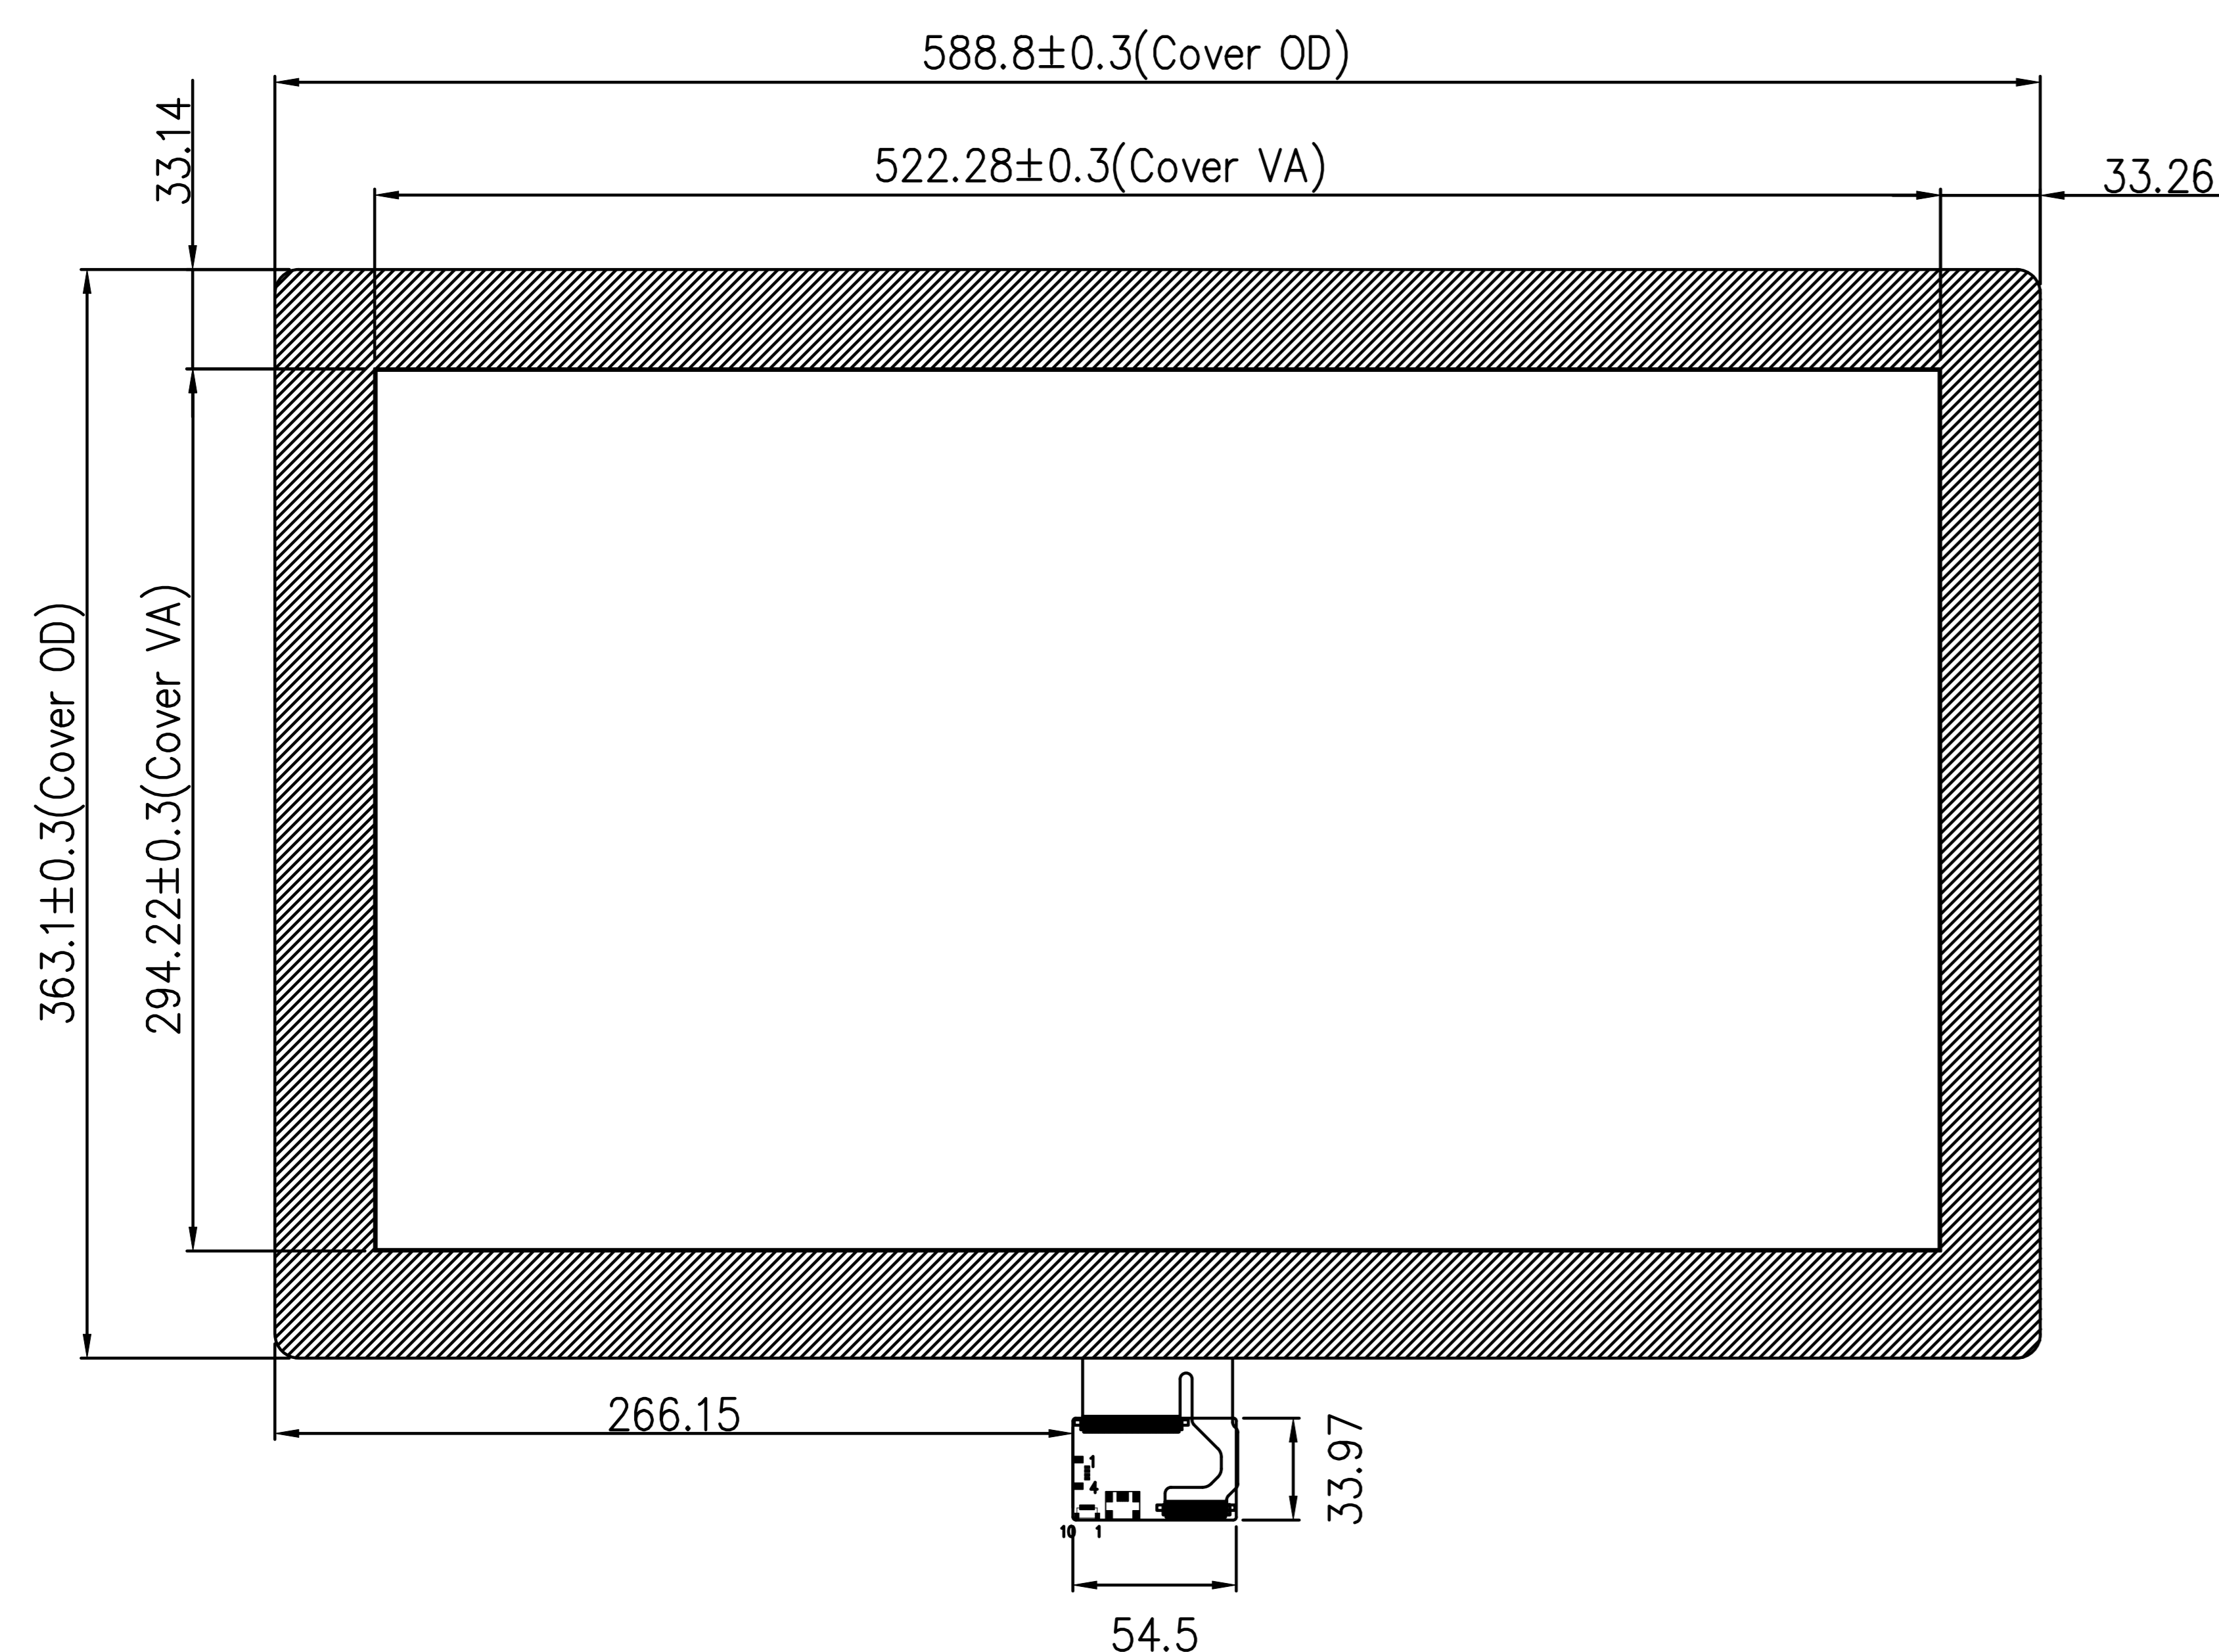

Screen printing area: Print Black

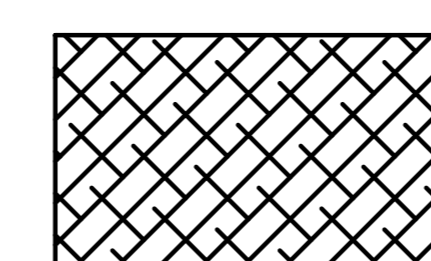

Frame adhesive foam area = 0.75mm

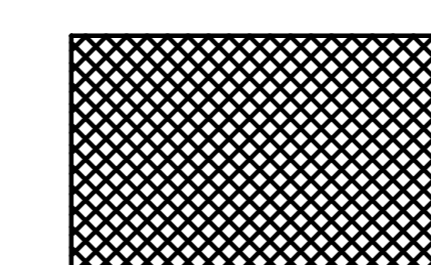

Frame adhesive area = 0.175mm

Front view

Side view


Back view

Technical parameters

1.Interfaces :	USB	7.Humidity range :	45~85%RH
2.Structure :	G+G	8.Transmittance :	≥85%
3.IC Solutions :	ILI2510	9.Surface hardness :	≥6H
4.Impact Resistance :	30.0ΦIA,Steel Ball /132g/Height=35cm/1time	10. Operate :	-20℃~+70℃, <85%RH
5.Touch points :	10 points	11. Storage :	-30℃~+80℃, <85%RH
6.Power supply :	5V	12.Unmarked dimension tolerance as±0.5	

USB(4PIN)

PIN	Definition
1	VCC
2	D-
3	D+
4	GND

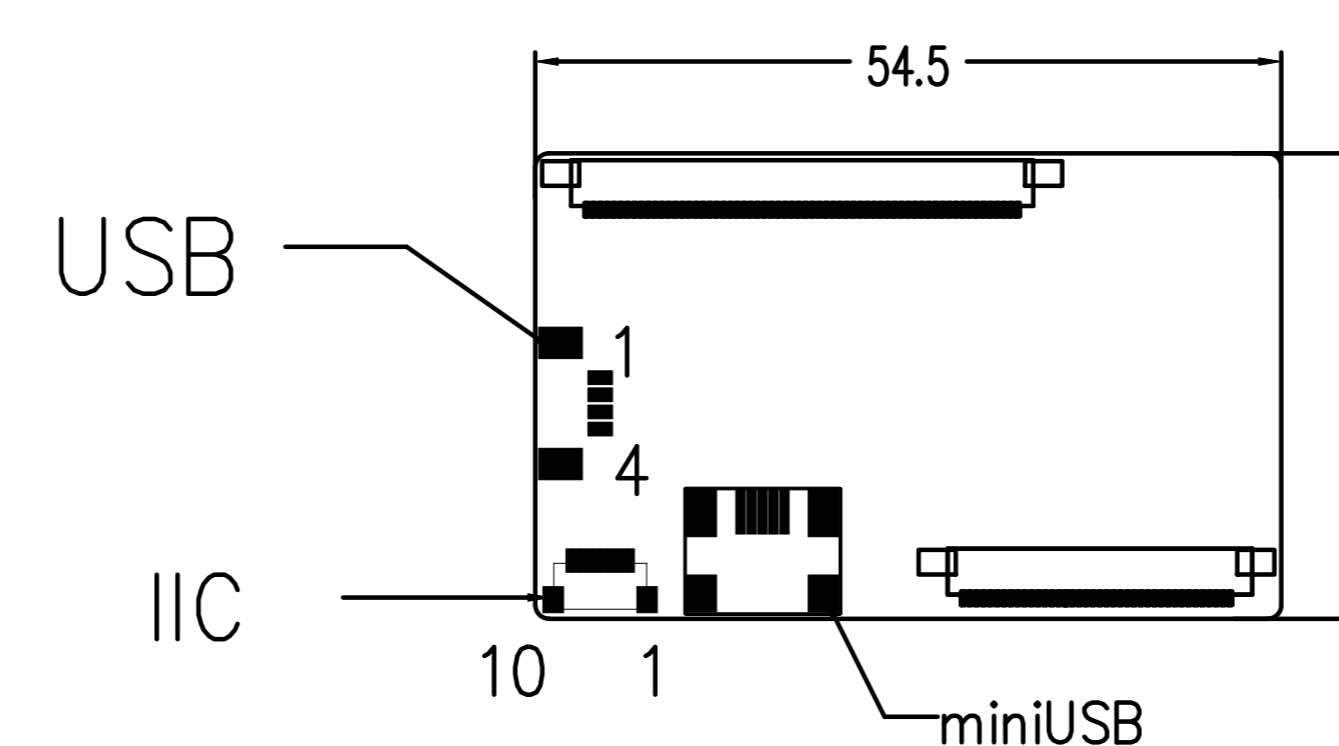

PCB Board SCALE 3:1



杭州宏泉科技有限公司
GraHowlet Technology CO.,Ltd

Model	HX2361801			View Direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2018-7-19	Edition	A1
Customer		Approved	HBZ	Date	2018-7-21	Proportion	1:1